

LED P8/P10 OUTDOOR DISPLAY(DIP)

P8/P10(DIP)



RGB



IP65



CE



Low power



Seamless



High definition display



Easy maintenance




Ultra low noise operation



Fast locker ,easy installation.



Magnesium Alloy cabinet, well ventilation, anti wear, anti collision.




Ultralight, cabinet weight only 35/38kg.



Current sharing power supply system to ensure the power of uninterrupted.

CONSTRUCTION DIAGRAM

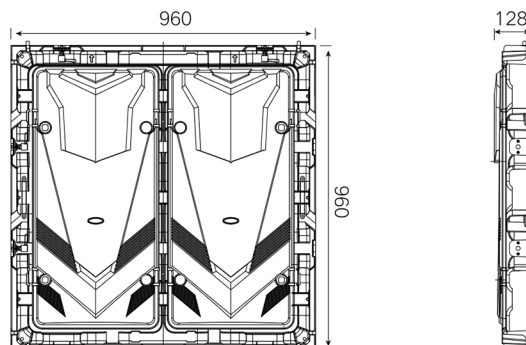

(Unit: mm)



SPECIFICATION

Type Number	M8-DIP	M10-DIP
Product Code	COL.PB.008.0013	COL.PB.010.8005
Pixel Pitch (MM)	8.0	10.0
Pixel Density (Dot/m ²)	15625	10000
LED Standard	DIP570	DIP570
Scan Type	1/5 Scan	1/4 Scan
Screen Brightness (CD/m ²)	≥6500	≥5500
Best Viewing Distance (M)	≥8	≥10
Screen Resolution	120*120	96*96
Cabinet Max. Power (W)	900	900
Cabinet Weight (KG)	35	38
Grey Scale (bits)	14	
Module Size (MM)	320X160	
Refresh Frequency (Hz)	≥1920	
Cabinet Material	Magnesium Alloy	
View Angle	110 °	
IP Grade	IP65	
Screen Working Temperature	-30 ~ 60°C	
Life Span	≥100,000 Hours	
Screen Working Voltage	AC 220V/(110V) ± 15%	
Operation System	Windows XP/Win 7/8/10	
Control Distance	LAN: 100m; Optical fiber: 10 km	